

Spring-return actuator for fire and smoke dampers 90° in ventilation and air-conditioning systems

- Nominal Torque 9 Nm / 7 Nm
- Nominal voltage AC 230 V
- Control open-close
- Spindle driver form fit 12x12 mm, continuous hollow shaft


Technical data

| | | |
|------------------------|--|--|
| Electrical data | Nominal voltage | AC 230 V |
| | Nominal voltage frequency | 50/60 Hz |
| | Nominal voltage range | AC 198...264 V |
| | Power consumption in operation | 4.5 W |
| | Power consumption in rest position | 2 W |
| | Power consumption for wire sizing | 9 VA |
| | Power consumption for wire sizing note | I _{max} 4 A @ 5 ms |
| | Auxiliary switch | 2 x SPDT |
| | Switching capacity auxiliary switch | 1 mA...3 (0.5 inductive) A, AC 250 V |
| | Switching points auxiliary switch | 5° / 80° |
| | Connection supply / control | Cable 1 m, 2 x 0.75 mm ² (halogen-free) |
| | Connection auxiliary switch | Cable 1 m, 6 x 0.75 mm ² (halogen-free) |
| Functional data | Torque motor | Min. 9 Nm |
| | Torque spring return | Min. 7 Nm |
| | Direction of rotation motor | Can be selected by mounting L/R |
| | Manual override | With position stop |
| | Angle of rotation | Max. 95° |
| | Running time motor | <60 s / 90° |
| | Running time spring-return | 20 s @ -10...55°C / <60 s @ -30...-10°C |
| | Sound power level motor | <55 dB(A) |
| | Sound power level spring-return | <67 dB(A) |
| | Spindle driver | Form fit 12x12 mm, continuous hollow shaft |
| Position indication | Mechanically, with pointer | |
| Service life | Min. 60,000 safety positions | |
| Safety | Protection class IEC/EN | II Protective insulated |
| | Protection class auxiliary switch IEC/EN | II Protective insulated |
| | Degree of protection IEC/EN | IP54 in all mounting positions |
| | EMC | CE according to 2014/30/EU |
| | Low voltage directive | CE according to 2014/35/EU |
| | Certification IEC/EN | IEC/EN 60730-1 and IEC/EN 60730-2-14 |
| | Mode of operation | Type 1.AA.B |
| | Rated impulse voltage supply / control | 4 kV |
| | Control pollution degree | 3 |
| | Ambient temperature normal operation | -30...55°C |
| | Ambient temperature safety operation | The safety position will be attained up to max. 75°C |
| | Non-operating temperature | -40...80°C |
| | Ambient humidity | 95% r.h., non-condensing |
| Maintenance | Maintenance-free | |
| Weight | Weight | 1.4 kg |

Safety notes


- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- Caution: Power supply voltage!

Safety notes

- The actuator is adapted and installed on the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied directly to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/safety extra-low voltage is not permitted.
- Cables must not be removed from the device.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

| | |
|---------------------------------------|--|
| Mode of operation | The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted. |
| Safety Position Lock | The Safety Position Lock™ reliably holds the fire damper in the safety position in case of fire therefor ensuring maximum safety. The technical solution for this function of the BFL and BFN actuators has a patent pending. |
| Signalling | Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The electrical contacts of these microswitches are equipped with a gold/silver coating that permits integration both in circuits with low currents (mA range) and in ones with larger-sized currents (A range) in accordance with the specifications in the data sheet. It should be noted with this application however that the contacts can no longer be used in the milliampere range after larger currents have been applied to them, even if this has taken place only once. The position of the damper blade can be read off on a mechanical position indication. |
| Manual operation | Without power supply, the actuator can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage. |
| Standards / regulations | The design of the actuator is based on the specific requirements from the European standards: <ul style="list-style-type: none"> - EN 15650 Ventilation for buildings – Fire dampers - EN 1366-2 Fire resistance tests on service installations (Part 2: Fire dampers) - EN 13501-3 Fire classification of construction products and building elements (Part 3: Classification using data from fire resistance tests on products and elements used in building service installations: fire resisting ducts and fire dampers) |
| Recommendation for application | Regular operational checks (open-close control of the fire damper) enhance the safety of people, animals, property and the environment. Unless other requirements are stipulated – e. g. in the damper manufacturer's operating instructions – Belimo recommends the performance of monthly operational checks. Fire damper actuators from Belimo are designed in accordance with service life specifications contained in the technical data sheet for regular operational checks. Notes for regular operational checks can be found in the European Product Standard for Fire Dampers (EN 15650) under "Maintenance information". |
| Delivery notes | Incl. hand crank, pointer, protective bag |

Accessories

| | Description | Type |
|-------------------------------|---|-------------|
| Electrical accessories | Communication and power supply unit for integration in Modbus networks, for 230 V actuators | BKN230-MOD |
| | Auxiliary switch 2 x SPDT | SN2-C7 |
| Mechanical accessories | Description | Type |
| | Bracket for auxiliary switch (SN2-C7) for BFL, BFN | ZSN-B |


Electrical installation

Notes

- Caution: Power supply voltage!
- The actuator must be protected by a fuse that does not exceed 16 A.
- Parallel connection of other actuators possible. Observe the performance data.
- Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.

Wiring diagrams

AC 230 V, open-close

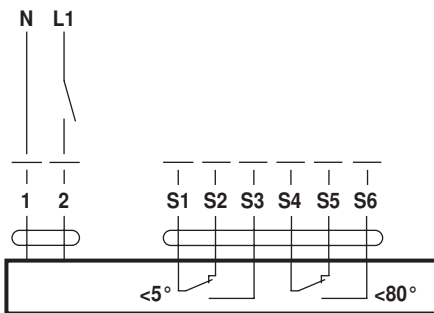

Cable colours:

- 1 = blue
- 2 = brown
- S1 = violet
- S2 = red
- S3 = white
- S4 = orange
- S5 = pink
- S6 = grey

Dimensions [mm]

Dimensional drawings

